


CSP Craig Snow Pusher

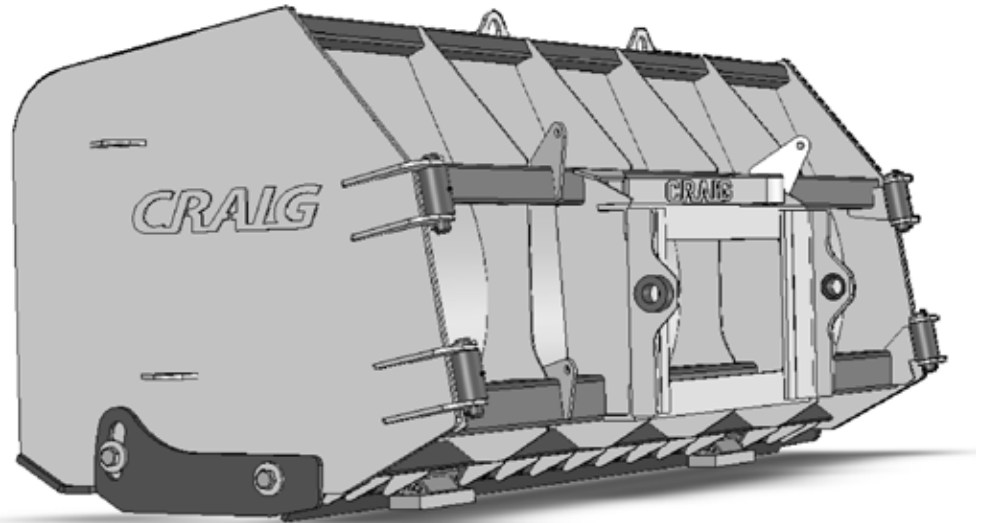

Overview

- 3/16" thick moldboard
- 39" manually collapsible end gates
- 52" tall moldboard
- Moldboard is constructed with a continuous curve
- Two lifting hooks for handling installed on the back of the moldboard

Wear Components

- High abrasive steel reversible cutting edge is 8" x 5/8"
- Cutting edge secures to moldboard using 5/8" carriage bolts
- Cutting edge bolt holes are spaced 8" on center
- 1.5" replaceable wear shoes are secured and adjusted using two 5/8" grade 8 bolts each with 1.25" of height adjustment

Back Frame

- Push frame connects to moldboard via a 4.25"ID (5"OD) X .375" wall square tube beams
- .3125" Thick Ribs

Options

- Widths from 8' to 30'+
- Reversible carbide edge
- Rubber edges
- Removable end gates
- Rubber deflector and visibility flags

Craig Manufacturing Ltd. warrants to the original purchaser all products manufactured by CRAIG to be free from defects in material and workmanship for a period of (12) months starting from the date of delivery from factory unless otherwise specified.

CRAIG
QUALITY WE STAND BEHIND
Attachments • Built Right • Fit Right